

**ELECTRONIC CONTROL**

With the electronic control, all cutting parameters can be saved and loaded again. Maintenance tasks can also be stored in a customer-specific manner. During the automatic cutting process, all parameters such as feed speed, cutting force etc. can be modified.

PROGRAM CYCLE

By pressing the start button, the main motor and the feed are activated. The integrated cut detection ensures a constant cutting behavior, even when the cutting disk wears during sectioning.

The feed speed is automatically decreased when an overload occurs during the cutting process.

BRILLANT 265

The universal wet-abrasive cut-off machine BRILLANT 265 with automatic travel and cut-off allows precise, soft touch cutting with 2 axes in arbitrary directions (Y/X axis) and can be equipped with an automatic or manual Z-axis for parallel serial-cuts (option).

The newly developed intuitive user software with graphical LCD interface makes the automatic process sequence easy and clear.

The large cutting chamber of solid, powder coated aluminum

construction is easily accessible through sliding door and side doors. Complex geometric shaped samples can be fixed securely on the T-slot table using our reliable clamping systems.

The innovative Quick-Change system facilitates maintenance and replacement of the cutting disc.

Our approved LED illumination of the cutting chamber is energy saving, damage resistant and guarantees optimum illumination of the cutting chamber.

PULSED CUTTING

Especially when the material is thick and difficult to cut, the adjustable automatic pulsed-cut offers advantages such as gentle cutting and optimal cooling of the intersection area.

**PRECISION CROSS FEED**

The Z-axis is integrated in the table. This allows keeping the cutting height at the same level. The automatic cross feed with serial cutting function produces precise parallel cuts.

CUTTING FORCE DEPENDENT FEED CONTROL

The feed speed automatically decreases when the cutting force reaches a pre-defined limit. This protects the machine, sample and clamping tools from over-loading.

JOYSTICK CONTROL

To reduce times for setting up, all axes can be controlled with a joystick.





SAFETY

Integrated safety protection only allows the automatic doors to be opened when the cutting wheel has stopped rotating.



LASER ALIGNMENT

With the optional line laser the cutting line can be projected on the sample. This helps to define the exact cutting position.



BASIC MODULE

BRILLANT 265



Order No.: M1842000

- » automatic horizontal and vertical movement (X- and Y-axis)
- » variable speed



- » 10.1" Touch-Screen user interface with intuitive ATM user software



- » superior LED illumination of cutting chamber



- » parallel setting of wheel guard during cutting sequences increases cutting capacity

- » opening on the right for long parts

- » automatic touch detection

- » cutting-force dependent feed control (X- and Y-axis)

- » 200 customized programs storable

- » solid aluminum design

EQUIPMENT

POWER SUPPLY

Equipment 1

Variable speed

Order No.: A1842000

400 V/50 Hz (3Ph/N/PE)

Equipment 2

Variable speed

Order No.: A1842001

480 V/60 Hz (3Ph/PE)

Equipment 3

Variable speed

Order No.: A1842002

220 V/60 Hz (3Ph/PE)



EQUIPMENT

TABLE DRIVE

Equipment 1

X-axis automatic (without Z-axis)

Order No.: A1842003

- » included in basic unit

Equipment 2

X-axis automatic

Z-axis (cross feed) manual (hand wheel)

Order No.: A1842004

- » made of stainless steel

Travel Z-axis 150 mm

Precision 0.1 mm

Equipment 3

X-axis automatic

Z-axis (cross feed) automatic

Order No.: A1842005

- » made of stainless steel

Travel Z-axis 150 mm

Precision 0.1 mm



EQUIPMENT

COOLING AND FILTER SYSTEMS

Equipment 1

Recirculation cooling unit

Order No.: A1842008

Tank	appr. 130 ltr.
Pump	appr. 100 ltr./min
WxHxD	625x608x810 mm

- » integrated, mobile
- » multi-chamber filtration
- » inlet sieve with filter bag
(see consumables)




Equipment 2

Belt filter system 285

Order No.: A1842011

Tank	285 ltr.
Filtering capacity	100 ltr./min (referring emulsion)
Pump	100 ltr./min
Filter area	0.85 m ²
Filter fleece width	710 mm
WxHxD	929x790x1745 mm
Weight approx.	120 kg

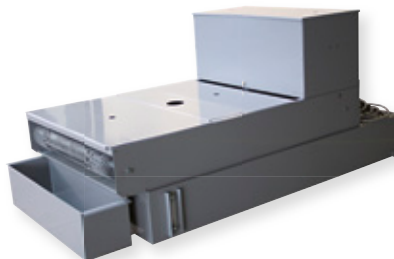

- » incl. filter roll
- » for belt filter system please order connection set

**Connection set
for belt filter system 285**

Order No.: Z6501003

**LASER ALIGNMENT AID**

Order No.: A1842009

- » laser line to visualize the cutting line
- » laser class 1

CENTRIFUGAL SEPARATOR

OPTION




Order No.: A1842010

- » removes coolant mist
- » purifies the air and increases visibility
- » exhaust power 425 m³/h

**ROTATION TOOL***on request*

- » tool with vertical rotary feed,
parallel to wheel
- » angle input via software control

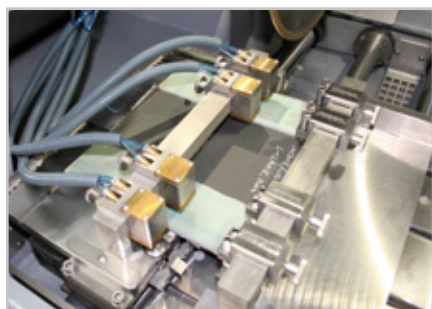**PULSED CLAMPING SYSTEM FOR BRILLANT 255/265**

OPTION



- » parallel, continuous serial cuts of 5–130 mm width
- » clamping and adjusting of sheet material up to 10 mm thickness in Z-direction
- » max. material width (cutting length) 300 mm with cut-off wheel Ø 350 mm

Manual

Order No.: Z1841010

- » for manual Z-axis

Automatic

Order No.: Z1841011

- » for automatic Z-axis



SPECIFICATIONS

Max. theoretical cutting capacity	Ø 150 mm
Cut-off wheel	Ø 406/16" mm
Arbour size	Ø 32 mm
Horizontal movement	345 mm
Vertical movement	200 mm
Cross feed	150 mm
Feed rate	0.001-40 mm/sec
Table WxD	1 550x375 mm (without Z-axis)
	2 420x375 mm (with Z-axis)
	3 420x375 mm (with Z-axis)
T-slot	12 mm

Motor cut-off wheel	7 kW, S1-mode
Connected load	17 kVA
Variable speed	1000-2900 U/min
Power supply	1 400 V/50 Hz (3Ph/N/PE)
	2 480 V/60 Hz (3Ph/PE)
	3 220 V/60 Hz (3Ph/PE)
WxD ~	1134x1610x930 mm
Weight ~	480 kg (depends on equipment)

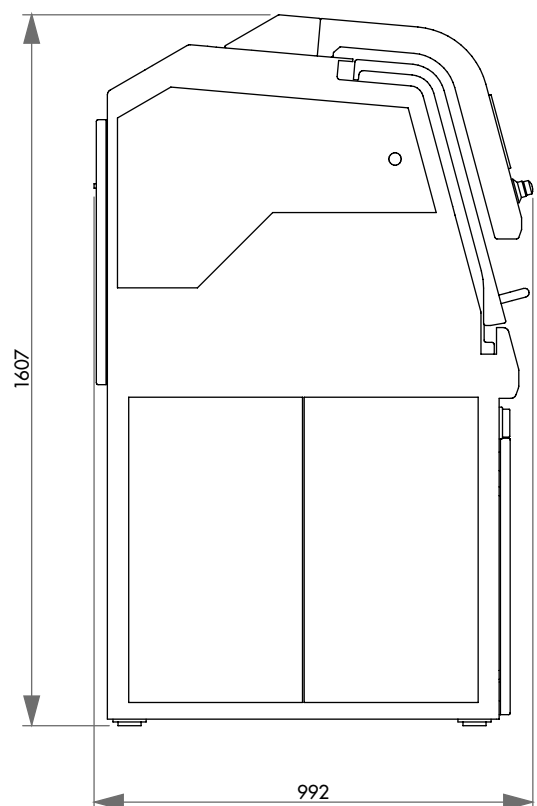
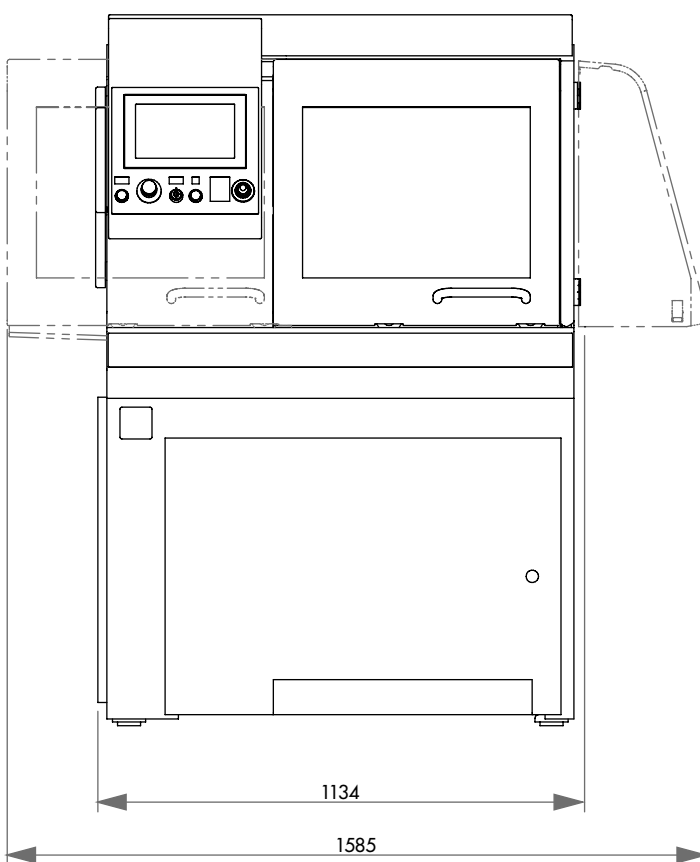


Illustration: Basic unit without equipment, options and accessories. Further information is available on request.